


COMMANDDECK

KVM add-ons, Article number A3200121

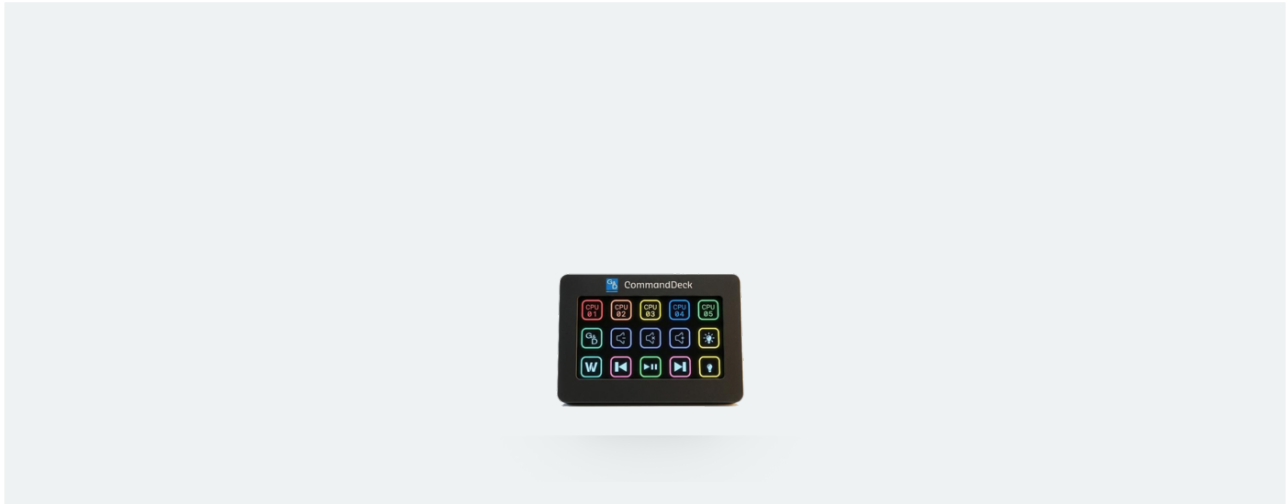

The CommandDeck is a highly flexible, external control element for KVM solutions that can be used to facilitate the execution of functions and shortcuts (key combinations). This is possible because the integrated display supports up to 15 virtual soft buttons, to which any key combination and HID key commands can be assigned. Communication with the systems takes place via a USB HID (Human Interface Device) interface, which is why it is compatible with all devices that offer a standard HID interface for keyboards. The layout of the keypad on the display can be customized as desired. It is also possible to use the buttons to access another layer with 15 buttons. This makes it possible to define up to 14 functions per button. The icons and images of the buttons can be defined by the user to make the keypad clearer. The CommandDeck is ideal for control rooms, control centers, and workstations where complex commands and shortcuts need to be executed quickly.

DETAILS

DEVICE

- Flexible control element for KVM solutions
- Communicates via a standard HID interface
- Configuration and programming is carried out once using dedicated software
- No additional drivers, services, or client software required for ongoing operation
- The configurations created are stored directly on the device

FEATURES

OPERATION

- Features multiple freely definable keypad layouts
- The icons and images of the virtual buttons can be freely selected
- Offers an integrated display with up to 15 virtual soft buttons
- Each button can be assigned a shortcut (e.g., hotkeys, key combinations, etc.)
- The buttons can also lead to sub-layers with another 15 buttons
- Supports up to 15 buttons, each with up to 14 different functions (1 button for switching between layers)

TECHNICAL DATA

General	Brand	G&D
	Product group	KVM add-ons
	Product Family	CommandDeck
	Country of origin	Taiwan
Housing	Material	Plastic
	Active cooling (fan)	no
	Width ca.	118.6 mm
	Height ca.	27.3 mm
	Depth ca.	89.4 mm
Operating conditions	MTBF	30,000 h at 25°C

CONTACT

WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

TECHNICAL SALES

Tel.: +49 271 23872-333
Fax: +49 271 23872-120
E-Mail: sales@panoptec.com

HEADQUARTERS

Panoptec Europe GmbH
Obere Leimbach 9 | 57074 Siegen | NRW |
Deutschland

Tel.: +49 271 23872-0
Fax: +49 271 23872-120
E-Mail: sales@panoptec.com

US OFFICE

G&D North America Inc.
4540 Kendrick Plaza Drive | Suite 100
Houston, TX 77032 | United States

Tel.: +1-346-620-4362
E-Mail: sales.us@gdsys.com

MIDDLE EAST OFFICE

Panoptec Europe GmbH
Dubai Studio City | DSC Tower
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178
E-Mail: sales@panoptec.com

APAC OFFICE

Panoptec Europe GmbH
60 Anson Road #17-01
Singapore 079914

Tel.: +65 9685 8807
E-Mail: sales@panoptec.com