
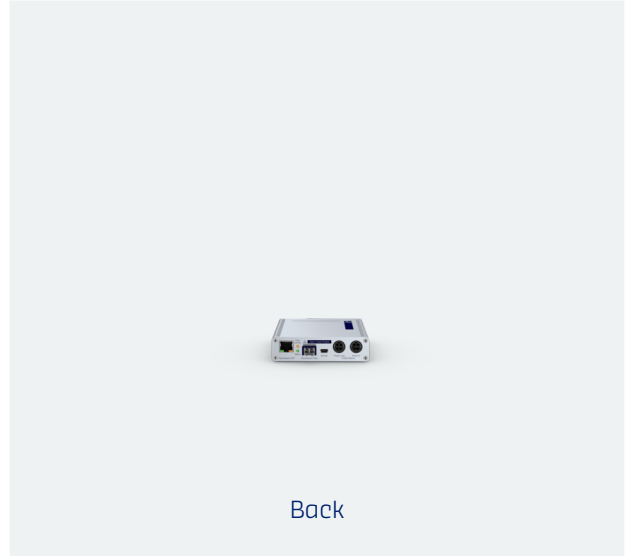


DVI-FIBERLINK(M) INCL. POWERPACK

KVM add-ons, Article number A2300052

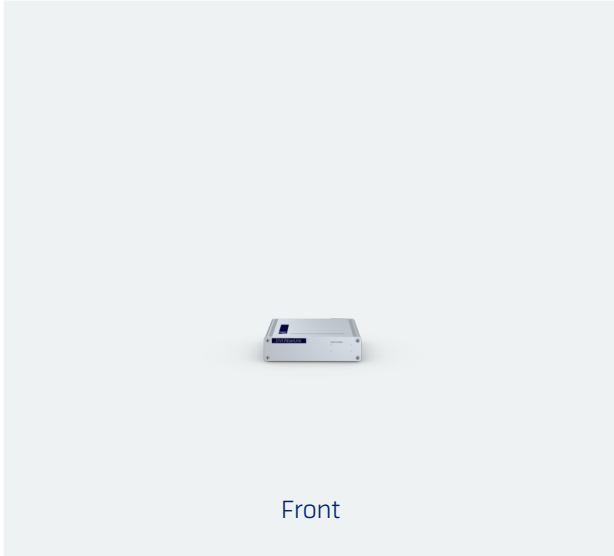

The DVI-FiberLink increases the system range within a digital matrix system. A DVI-FiberLink system consists of two identical modules (transceivers) that act as media converters between CAT and fiber in both directions. The DVI-FiberLink pair is placed at any position, on the computer or user side of the matrix switch between two system components. One access is extended per DVI-FiberLink pair.

SCOPE OF DELIVERY

| Quantity | Description | Article number |
|----------|---|----------------|
| 1 | PowerCable-2 Standard cable 2m | A6300057 |
| 1 | Netzteil 12V / 2,08AFSP025-D12C14 FSP | Z0005926 |
| 1 | Safety instructions flyer - FCC class B | A9100371 |

DETAILS

TRANSMISSION

- The transmission distance is up to 550 meters over fiber multimode optics, incl. transmission module(s)/SFP transceiver(s)

DEVICE

- Active media converter from CAT to fiber
- External power supply

OPERATION

- The device can be placed between the following components:
 - Two digital matrix switches
 - A computer module (e. g. DVI-CPU) and a digital matrix switch
 - A console module (e. g. DVI-CON) and a digital matrix switch

WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

FEATURES

DEVICE





- External power pack supplies up to five modules with power via the power loop function

TECHNICAL DATA

| | | |
|----------------------|--|-----------------------------------|
| General | Brand | G&D |
| | Product group | KVM add-ons |
| | Product Family | DVI-FiberLink |
| | Country of origin | Germany |
| | Power Supply | no redundancy |
| Maintenance | Update via | Update Wizard (service interface) |
| | Serviceport settings | 115200bps (8/N/1) |
| Housing | Material | Anodised aluminium |
| | Active cooling (fan) | no |
| | Width ca. | 105 mm |
| | Height ca. | 26 mm |
| | Depth ca. | 84 mm |
| | IP protection class | IP20 |
| | Weight ca. | 0.22 kg |
| Operating conditions | Operating environment temperature | 5 °C to 45 °C |
| | Operating air humidity, non-condensing | 20 % to 80 % |
| | Area of application | Indoor use |
| | Maximum operating altitude above sea level | 3,048 m |

| | | |
|--------------|--------------------------------------|---|
| | Storage environment temperature | -10 °C to 60 °C |
| | Storage air humidity, non-condensing | 15 % to 80 % |
| | MTBF | 250,000 h at 25°C |
| | Conformities | CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads) |
| Power supply | Quantity | 1 |
| | Type | External |
| | Input voltage | 12 VDC |
| | Current consumption | 0.3 A |
| | Power consumption idle | 1.3 W |
| | Power consumption max. | 2.4 W |
| | Heat output idle | 1.3 W |
| | Heat output max. | 2.4 W |

ACCESSORY PRODUCTS

| Image | Description | Article number |
|---|---|----------------|
|  | USB-Service-2 cable 2m Cable for system updates and configuration | A6200103 |
|  | PowerCable-3 Standard cable 3m Cable to connect the power supply type Germany | A6300066 |
|  | PowerCable-5 Standard cable 5m Cable to connect the power supply type Germany | A6300065 |
|  | CaseMount-Set-105-26 mounting bracket Screws & brackets for mounting devices with dimensions 105x26mm in DeviceCarriers | A7000020 |

MORE VARIANTS

| Description | Article number |
|---|----------------|
| DVI-FiberLink(M) Basic Media converter CAT to Fiber 1G multimode | A2300079 |
| DVI-FiberLink(S) Basic Media converter CAT to Fiber 1G singlemode | A2300080 |
| DVI-FiberLink(S) Incl. PowerPack Media converter CAT to Fiber 1G singlemode | A2300044 |

CONTACT

WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

TECHNICAL SALES

Tel.: +49 271 23872-333
Fax: +49 271 23872-120
E-Mail: sales@gdsys.com

HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung
Obere Leimbach 9 | 57074 Siegen | NRW |
Deutschland

Tel.: +49 271 23872-0
Fax: +49 271 23872-120
E-Mail: sales@gdsys.com

US OFFICE

G&D North America Inc.
4540 Kendrick Plaza Drive | Suite 100
Houston, TX 77032 | United States

Tel.: +1-346-620-4362
E-Mail: sales.us@gdsys.com

MIDDLE EAST OFFICE

Guntermann & Drunck GmbH
Dubai Studio City | DSC Tower
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178
E-Mail: sales.me@gdsys.com

APAC OFFICE

Guntermann & Drunck GmbH
60 Anson Road #17-01
Singapore 079914

Tel.: +65 9685 8807
E-Mail: sales.apac@gdsys.com