
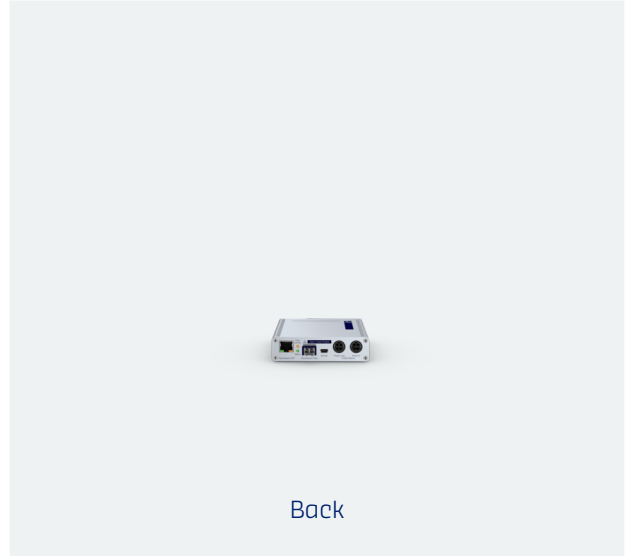


# DVI-FIBERLINK(M) INCL. POWERPACK

KVM add-ons, Article number A2300052

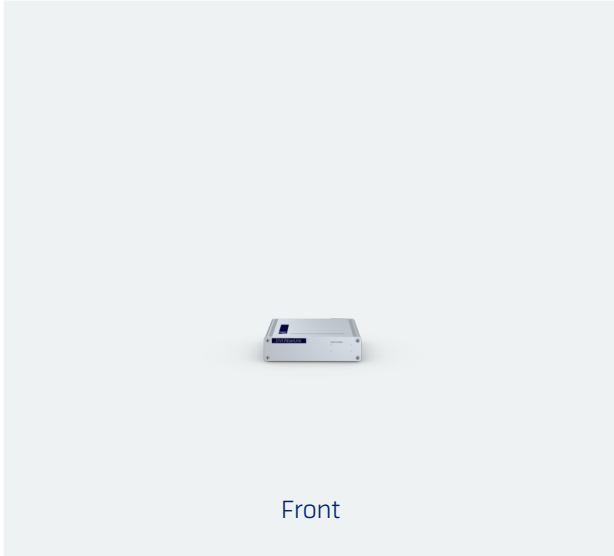

The DVI-FiberLink increases the system range within a digital matrix system. A DVI-FiberLink system consists of two identical modules (transceivers) that act as media converters between CAT and fiber in both directions. The DVI-FiberLink pair is placed at any position, on the computer or user side of the matrix switch between two system components. One access is extended per DVI-FiberLink pair.

## SCOPE OF DELIVERY

Quantity	Description	Article number
1	PowerCable-2 Standard cable 2m	A6300057
1	Netzteil 12V / 2,08AFSP025-D12C14 FSP	Z0005926
1	Safety instructions flyer - FCC class B	A9100371

## DETAILS

### TRANSMISSION

- The transmission distance is up to 550 meters over fiber multimode optics, incl. transmission module(s)/SFP transceiver(s)

### DEVICE

- Active media converter from CAT to fiber
- External power supply

### OPERATION

- The device can be placed between the following components:
  - Two digital matrix switches
  - A computer module (e. g. DVI-CPU) and a digital matrix switch
  - A console module (e. g. DVI-CON) and a digital matrix switch

### WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

## FEATURES

### DEVICE





- External power pack supplies up to five modules with power via the power loop function

## TECHNICAL DATA

General	Brand	G&D
	Product group	KVM add-ons
	Product Family	DVI-FiberLink
	Country of origin	Germany
	Power Supply	no redundancy
Maintenance	Update via	Update Wizard (service interface)
	Serviceport settings	115200bps (8/N/1)
Housing	Material	Anodised aluminium
	Active cooling (fan)	no
	Width ca.	105 mm
	Height ca.	26 mm
	Depth ca.	84 mm
	IP protection class	IP20
	Weight ca.	0.22 kg
Operating conditions	Operating environment temperature	5 °C to 45 °C
	Operating air humidity, non-condensing	20 % to 80 %
	Area of application	Indoor use
	Maximum operating altitude above sea level	3,048 m

	Storage environment temperature	-10 °C to 60 °C
	Storage air humidity, non-condensing	15 % to 80 %
	MTBF	250,000 h at 25°C
	Conformities	CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads)
Power supply	Quantity	1
	Type	External
	Input voltage	12 VDC
	Current consumption	0.3 A
	Power consumption idle	1.3 W
	Power consumption max.	2.4 W
	Heat output idle	1.3 W / 4.44 BTU/h
	Heat output max.	2.4 W / 8.19 BTU/h

## ACCESSORY PRODUCTS

Image	Description	Article number
	<b>USB-Service-2 cable 2m</b> Cable for system updates and configuration	A6200103
	<b>PowerCable-3 Standard cable 3m</b> Cable to connect the power supply type Germany	A6300066
	<b>PowerCable-5 Standard cable 5m</b> Cable to connect the power supply type Germany	A6300065
	<b>CaseMount-Set-105-26 mounting bracket</b> Screws & brackets for mounting devices with dimensions 105x26mm in DeviceCarriers	A7000020

## MORE VARIANTS

Description	Article number
<b>DVI-FiberLink(M) Basic</b> Media converter CAT to Fiber 1G multimode	A2300079
<b>DVI-FiberLink(S) Basic</b> Media converter CAT to Fiber 1G singlemode	A2300080
<b>DVI-FiberLink(S) Incl. PowerPack</b> Media converter CAT to Fiber 1G singlemode	A2300044

# CONTACT

## WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

### TECHNICAL SALES

Tel.: +1-833-928-1976  
Fax: +1-833-928-1976  
E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung  
Obere Leimbach 9 | 57074 Siegen | NRW |  
Deutschland

Tel.: +49 271 23872-0  
Fax: +49 271 23872-120  
E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### US OFFICE

G&D North America Inc.  
4540 Kendrick Plaza Drive | Suite 100  
Houston, TX 77032 | United States

Tel.: +1-346-620-4362  
E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### MIDDLE EAST OFFICE

Guntermann & Drunck GmbH  
Dubai Studio City | DSC Tower  
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178  
E-Mail: [sales.me@gdsys.com](mailto:sales.me@gdsys.com)

### APAC OFFICE

Guntermann & Drunck GmbH  
60 Anson Road #17-01  
Singapore 079914

Tel.: +65 9685 8807  
E-Mail: [sales.apac@gdsys.com](mailto:sales.apac@gdsys.com)