
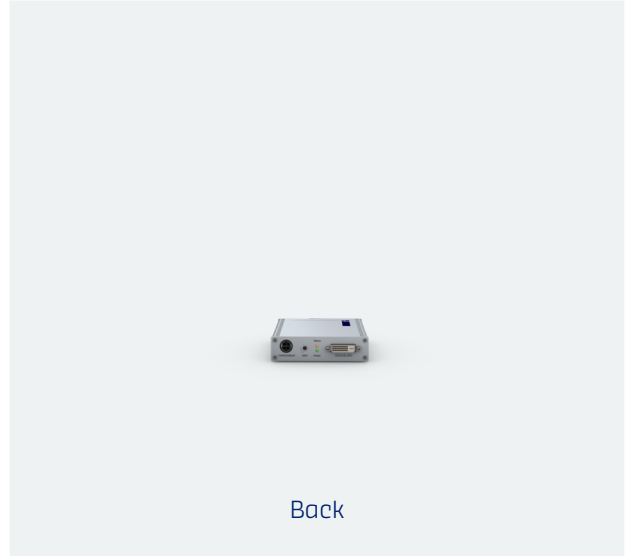


# DVISPLITTER2-DL

KVM add-ons, Article number A4000012

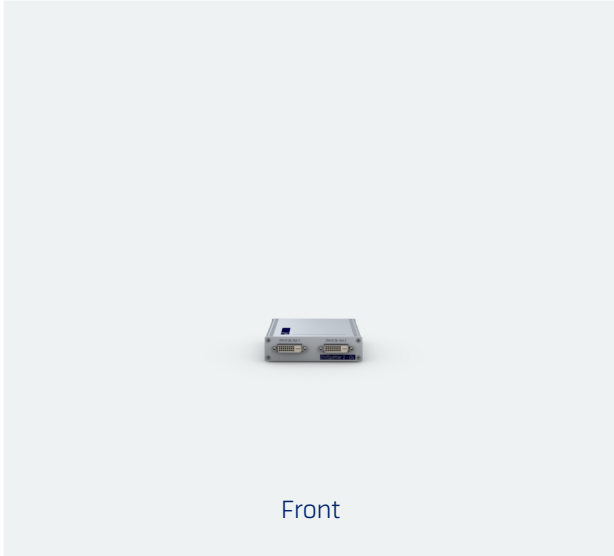

The Digital Signage product DVISplitter2-DL distributes one dual-link DVI video signal to multiple displays. The DVISplitter2-DL is a stand-alone device.

## SCOPE OF DELIVERY

Quantity	Description	Article number
1	Netzteil 12V / 2,08AFSP025-D12C14 FSP	Z0005926
1	PowerCable-2 Standard cable 2m	A6300057
1	DVI-D-DL-M/M-2 cable DVI-D 2m	A6300100
1	Safety instructions flyer - FCC class B	A9100371

## DETAILS

### VIDEO

- Distributes one dual-link DVI signal to two displays
- Transparent transmission of DDC information
- Resolution up to 2560 x 1600 @ 60 Hz
- Resolution up to 2560 x 1600 @ 60 Hz

### DEVICE

- Independent from any operating system
- Access to standard interfaces of the computer, with no software installation required
- External power supply

### WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

## EXTENSIONS

### SYSTEM EXTENSION

- cascadable up to 3 levels

## TECHNICAL DATA

General	Product group	KVM add-ons
	Product Family	DVISplitter2-DL
	Power Supply	no redundancy
Video input	Quantity	2
	Format	DualLink DVI
	Colour depth	24 bit
	Exemplary resolutions	2560 × 1600 (60 Hz) 1920 × 1200 (60 Hz) 1920 × 1080 (60 Hz) 1600 × 1200 (60 Hz) 1280 × 1024 (85 Hz) 1280 × 1024 (60 Hz)
	General Notes	Further VESA and CTA standardised resolutions possible within pixel rate and horizontal/vertical frequency.
Video output	Quantity	2
	Format	DualLink DVI
	Colour depth	24 bit
	Pixel rate ca.	0 MPixel/s to 330 MPixel/s
	Exemplary resolutions	2560 × 1600 (60 Hz) 1920 × 1200 (60 Hz) 1920 × 1080 (60 Hz) 1600 × 1200 (60 Hz) 1280 × 1024 (85 Hz) 1280 × 1024 (60 Hz)

	General Notes	Further VESA and CTA standardised resolutions possible within pixel rate and horizontal/vertical frequency.
Maintenance	Update via	no update possibility
Housing	Material	Anodised aluminium
	Width ca.	105 mm
	Height ca.	26 mm
	Depth ca.	84 mm
	IP protection class	IP20
	Weight ca.	0.2 kg
Operating conditions	Operating environment temperature	5 °C to 40 °C
	Operating air humidity, non-condensing	20 % to 80 %
	Area of application	Indoor use
	Maximum operating altitude above sea level	3,048 m
	Storage environment temperature	-10 °C to 55 °C
	Storage air humidity, non-condensing	15 % to 85 %
	MTBF	150,000 h at 25°C

	Conformities	CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads)
Power supply	Quantity	1
	Type	External
	Input voltage	12 VDC
	Current consumption	0.2 A
	Power consumption idle	0.5 W
	Power consumption max.	2.4 W
	Heat output idle	0.5 W
	Heat output max.	2.4 W

# CONTACT

## WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

### TECHNICAL SALES

Tel.: +1-833-928-1976  
Fax: +1-833-928-1976  
E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung  
Obere Leimbach 9 | 57074 Siegen | NRW |  
Deutschland

Tel.: +49 271 23872-0  
Fax: +49 271 23872-120  
E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### US OFFICE

G&D North America Inc.  
4540 Kendrick Plaza Drive | Suite 100  
Houston, TX 77032 | United States

Tel.: +1-346-620-4362  
E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### MIDDLE EAST OFFICE

Guntermann & Drunck GmbH  
Dubai Studio City | DSC Tower  
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178  
E-Mail: [sales.me@gdsys.com](mailto:sales.me@gdsys.com)

### APAC OFFICE

Guntermann & Drunck GmbH  
60 Anson Road #17-01  
Singapore 079914

Tel.: +65 9685 8807  
E-Mail: [sales.apac@gdsys.com](mailto:sales.apac@gdsys.com)