



# DP-HR-U-CPU-FIBER(M)-DH-UC 3.0 BASIC

KVM extenders, Article number A2320457

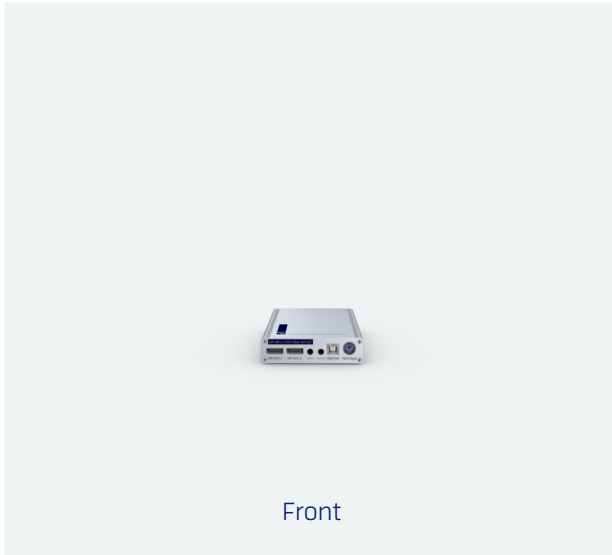

Front

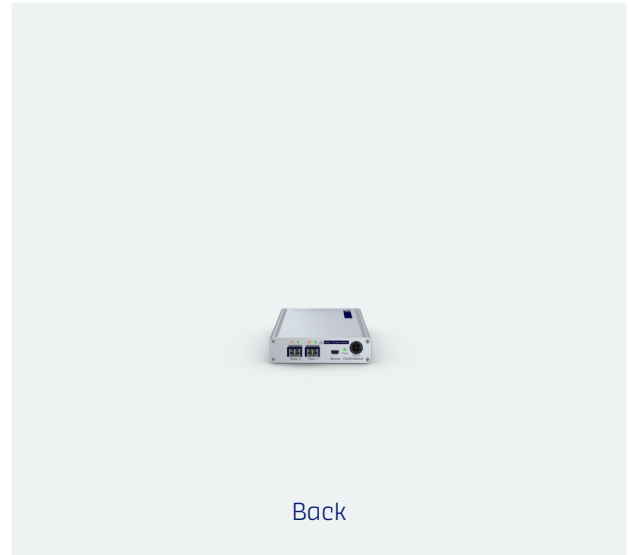

Back

The matrix-compatible KVM extenders of the DP-HR-CPU series extend keyboard, video, and mouse signals, as well as other peripheral data (e.g., audio and USB), via a dedicated CAT or fiber connection (up to 10,000 m). An extender system consists of a computer module (CPU) and a compatible console module (CON). Computers can be controlled in near real-time – both in extender and matrix applications. The DP-HR-CPU series supports DisplayPort 1.1 for high-resolution video up to 2560 × 1600 (60 Hz) or 4096 × 2160 (30 Hz). Video data is processed pixel-perfectly and offers excellent hand-eye coordination, thanks to bluedec™ – G&D's advanced, multi-stage, lossless compression technology.

## SCOPE OF DELIVERY

| Quantity | Description                  | Article number |
|----------|------------------------------|----------------|
| 1        | USB-AM/BM-2 cable USB 2m     | A6300113       |
| 2        | DP1.4-Cable-M/M-2 SK13357 2m | A6300173       |
| 2        | Audio-M/M-2-ferrite cable 2m | A6300083       |

## DETAILS

### VIDEO

- bluedec™ – advanced developed multi-stage compression for best video quality and practically latency-free transmission. This method enables pixel-perfect video transmission with efficient bandwidth use.
- The end devices can be flexibly combined with each other, even if they process different video signals (Mix & Match)
- Use of a monitor profile optimized for the computer module (EDID profile)
- Flexible use of the EDID data of the workplace monitor as required
- Resolution up to  
2560 × 1600 @ 60 Hz,  
4096 × 2160 @ 30 Hz
- The DualHead variant (DH) allows the transmission of two separate video signals via one transmission cable. Both video channels support embedded audio.
  - Two-channel operation supports a guaranteed total pixel rate of up to 330MPixel/s.
  - The second video channel supports up to 165MPixel/s.
  - This corresponds, for example, to a resolution of up to  
1920 × 1200 @ 60 Hz,  
1920 × 1080 @ 60 Hz or  
1280 × 1024 @ 60 Hz.
  - If the resolution on the second video channel is lower, the main channel can transmit a higher resolution.
  - Exceeding the total pixel rate of 330MPixel/s may result in a loss of quality.

### SIGNALS

- Bidirectional audio signals (stereo)
- Embedded stereo audio (Digital, 2 channel LPCM)
- Embedded USB 2.0 with Full Speed, transparent, all USB classes

### TRANSMISSION

- The transmission distance is up to 400 meters over fiber multimode optics, incl. transmission module(s)/SFP transceiver(s)

### DEVICE

- Improved security through physical separation between workplaces and computers
- Access to standard interfaces of the computer, with no software installation required
- The devices are compatible with the ControlCenter-Digital and ControlCenter-Compact series (matrix operation) and other end devices for computer and workplace connections (extender operation)

- PowerPack not included in the scope of delivery for Basic variants
- UC variant: computer module with two transmission lines for redundancy
  - These modules can be connected to various counterparts, such as compatible console modules or KVM matrix switches
- MultiChannel variants (MC): Modules for multi-monitor workplaces with multi-channel video
  - MC mode uses the full bandwidth for each video channel, whereby a separate transmission line is required for each channel

## WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension/guarantee renewal possible

## FEATURES

### OPERATION FEATURES

- Ready for operation out of the box, no additional configuration required
- Permanent keyboard/mouse emulation ensures a stable system
- Compatibility with special USB-HID input devices
- Operation via multilingual on-screen display (OSD) and hotkeys
- Support of DDC/CI (Display Data Channel / Command Interface) to enable centralized software-side control of monitor settings such as brightness

## EXTENSIONS

### DEVICE

- External power supply via external 12V power pack or G&D-MultiPower, providing a central and redundant power supply
- Device mounting via RackMount sets, TableMount sets or other mounting tools

### SYSTEM EXTENSION

- You can integrate the matrix-compatible extenders into a complete installation with a ControlCenter-Compact or ControlCenter-Digital, even at a later point in time. This provides you with even greater flexibility through the possibility of distributed access – and the existing components can continue to be used.

## TECHNICAL DATA

|               |                                 |                                                                                                                                                                |
|---------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General       | Product group                   | KVM extenders<br>KVM matrix systems                                                                                                                            |
|               | Number of sources               | 1                                                                                                                                                              |
| Input options | USB mouse                       | yes                                                                                                                                                            |
|               | USB keyboard                    | yes                                                                                                                                                            |
|               | PS/2 mouse                      | yes                                                                                                                                                            |
|               | PS/2 keyboard                   | yes                                                                                                                                                            |
| Transmission  | Number of transmission channels | 2                                                                                                                                                              |
|               | Redundant transmission channels | Redundant KVM transmission available                                                                                                                           |
|               | Range                           | 100 m (62.5/125µm)<br>200 m (50.0/125µm, OM2)<br>400 m (50.0/125µm, OM3)<br>70 m (62.5/125µm)<br>150 m (50.0/125µm)<br>400 m (50.0/125µm, OM4 -<br>4700MHz*km) |
|               | Laser class                     | Class 1                                                                                                                                                        |
|               | Type of interface               | LC-Duplex                                                                                                                                                      |
|               | Wavelength                      | 850 nm                                                                                                                                                         |
|               | KVM matrix system component     | Computer module                                                                                                                                                |
|               | Medium                          | Fiber MM                                                                                                                                                       |
|               | Data rate                       | 2.5 Gbit/s                                                                                                                                                     |
|               | Number of video channels        | 2                                                                                                                                                              |

|               |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|               | Max. total bandwidth DualHead | 330 MPixel/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | Format                        | DisplayPort 1.1 (HBR)                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|               | Colour depth                  | 24 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|               | Pixel rate                    | ca. 25 MPixel/s to ca. 300 MPixel/s                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|               | Vertical frequency            | 24 Hz to 120 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|               | Horizontal frequency          | 25 kHz to 135 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|               | Exemplary resolutions         | 4096 × 2160 (24 Hz) - 2K / WQXGA<br>4096 × 2160 (25 Hz) - 2K / WQXGA<br>2048 × 2048 (60 Hz) - 2K / WQXGA<br>4096 × 2160 (30 Hz) - 2K / WQXGA<br>3840 × 2160 (24 Hz) - 2K / WQXGA<br>3840 × 2160 (25 Hz) - 2K / WQXGA<br>3840 × 2160 (30 Hz) - 2K / WQXGA<br>2560 × 1600 (60 Hz) - 2K / WQXGA<br>1920 × 1200 (60 Hz) - Full HD / WUXGA<br>1920 × 1080 (60 Hz) - Full HD / WUXGA<br>Further VESA and CTA standardised resolutions possible within pixel rate and horizontal/vertical frequency. |
|               | Supported industry standards  | Display Data Channel (DDC)<br>Display Data Channel Command Interface (DDC/CI)<br>Extended Display Identification Data (EDID)                                                                                                                                                                                                                                                                                                                                                                  |
| Video input 2 | Number of video channels      | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|               | Max. total bandwidth DualHead | 330 MPixel/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|               | Format                        | DisplayPort 1.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|               | Colour depth                  | 24 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|               | Pixel rate                    | ca. 25 MPixel/s to ca. 165 MPixel/s                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|         |                              |                                                                                                                                                                                                                                                                               |
|---------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | Vertical frequency           | 24 Hz to 120 Hz                                                                                                                                                                                                                                                               |
|         | Horizontal frequency         | 25 kHz to 135 kHz                                                                                                                                                                                                                                                             |
|         | Exemplary resolutions        | 1920 × 1200 (60 Hz) - Full HD / WUXGA<br>1920 × 1080 (60 Hz) - Full HD / WUXGA<br>1280 × 1024 (85 Hz) - Full HD / WUXGA<br>640 × 480 (60 Hz) - Full HD / WUXGA<br>Further VESA and CTA standardised resolutions possible within pixel rate and horizontal/vertical frequency. |
|         | Supported industry standards | Display Data Channel Command Interface (DDC/CI)<br>Extended Display Identification Data (EDID)                                                                                                                                                                                |
| Audio   | Transmission type            | Bidirectional<br>Stereo                                                                                                                                                                                                                                                       |
|         | Resolutions                  | 24 bit digital                                                                                                                                                                                                                                                                |
|         | Sampling rate                | up to 96 kHz                                                                                                                                                                                                                                                                  |
|         | Bandwidth                    | 22 kHz                                                                                                                                                                                                                                                                        |
|         | Audio support                | Analog                                                                                                                                                                                                                                                                        |
| Audio 2 | Transmission type            | Stereo<br>2-channel LPCM                                                                                                                                                                                                                                                      |
|         | Resolutions                  | 24 bit<br>20 bit<br>16 bit                                                                                                                                                                                                                                                    |
|         | Sampling rate                | up to 48 kHz                                                                                                                                                                                                                                                                  |
|         | Audio support                | Digital Embedded                                                                                                                                                                                                                                                              |
| USB     | Specification                | USB 2.0                                                                                                                                                                                                                                                                       |
|         | Medium                       | Embedded                                                                                                                                                                                                                                                                      |

|                      |                            |                                   |
|----------------------|----------------------------|-----------------------------------|
|                      | Transmission rate          | 16 Mbit/s (app. Full Speed)       |
|                      | Range                      | max. 400 m                        |
|                      | USB classes                | All                               |
| Maintenance          | Update via                 | Update Wizard (service interface) |
|                      | Serviceport settings       | 115200bps (8/N/1)                 |
| Housing              | Material                   | anodised aluminium                |
|                      | Width                      | ca. 105 mm                        |
|                      | Height                     | ca. 26 mm                         |
|                      | Depth                      | ca. 164 mm                        |
|                      | IP protection class        | IP20                              |
|                      | Weight                     | ca. 0.43 kg                       |
| Operating conditions | Operating temperature      | 5 °C to 45 °C                     |
|                      | Operating air humidity     | 20 % to 80 %, non-condensing      |
|                      | Area of application        | Interior                          |
|                      | Maximum operating altitude | 3048m above sea level             |
|                      | Storage temperature        | -20 °C to 60 °C                   |
|                      | Storage air humidity       | 15 % to 85 %, non-condensing      |
|                      | MTBF                       | 200000 h at 25°C                  |

|              |                        |                                                                                                                                                                                                                                                                   |
|--------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply | Conformities           | CE compliant (see downloads)<br>UKCA compliant (see downloads)<br>FCC compliant (see manual)<br>TAA compliant (see downloads)<br>EAC compliant (see downloads)<br>RoHS compliant (see downloads)<br>WEEE (reg. no. DE30763240)<br>REACH compliant (see downloads) |
|              | Input voltage          | 12 VDC                                                                                                                                                                                                                                                            |
|              | Current consumption    | 0.9 A                                                                                                                                                                                                                                                             |
|              | Power consumption idle | 5.8 W                                                                                                                                                                                                                                                             |
|              | Power consumption max. | 9.6 W                                                                                                                                                                                                                                                             |
|              | Heat output idle       | 5.8 W                                                                                                                                                                                                                                                             |
|              | Heat output max.       | 9.6 W                                                                                                                                                                                                                                                             |

## MORE VARIANTS

| Description                                                                                                                                                                                                              | Article number |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>DP-HR-CPU-Fiber(M) 3.0 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                                 | A2320413       |
| <b>DP-HR-CPU-Fiber(M) 3.0 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                       | A2320414       |
| <b>DP-HR-CPU-Fiber(M) Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                                     | A2320266       |
| <b>DP-HR-CPU-Fiber(M) Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                           | A2320130       |
| <b>DP-HR-CPU-Fiber(M)-DH 3.0 Basic</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                                          | A2320415       |
| <b>DP-HR-CPU-Fiber(M)-DH 3.0 Incl. PowerPack</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                                | A2320416       |
| <b>DP-HR-CPU-Fiber(M)-DH Basic</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                                              | A2320200       |
| <b>DP-HR-CPU-Fiber(M)-DH Incl. PowerPack</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                                    | A2320199       |
| <b>DP-HR-CPU-Fiber(M)-DH-UC 3.0 Basic</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode           | A2320417       |
| <b>DP-HR-CPU-Fiber(M)-DH-UC 3.0 Incl. PowerPack</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode | A2320418       |
| <b>DP-HR-CPU-Fiber(M)-DH-UC Basic</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode               | A2320209       |
| <b>DP-HR-CPU-Fiber(M)-DH-UC Incl. PowerPack</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode     | A2320201       |
| <b>DP-HR-CPU-Fiber(M)-MC2 3.0 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                             | A2320419       |

| Description                                                                                                                                                                                                 | Article number |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>DP-HR-CPU-Fiber(M)-MC2 3.0 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                      | A2320420       |
| <b>DP-HR-CPU-Fiber(M)-MC2 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                    | A2320164       |
| <b>DP-HR-CPU-Fiber(M)-MC2 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                          | A2320163       |
| <b>DP-HR-CPU-Fiber(M)-UC 3.0 Basic</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode           | A2320421       |
| <b>DP-HR-CPU-Fiber(M)-UC 3.0 Incl. PowerPack</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode | A2320422       |
| <b>DP-HR-CPU-Fiber(M)-UC Basic</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode               | A2320267       |
| <b>DP-HR-CPU-Fiber(M)-UC Incl. PowerPack</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode     | A2320138       |
| <b>DP-HR-U-CPU-Fiber(M) 3.0 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                  | A2320453       |
| <b>DP-HR-U-CPU-Fiber(M) 3.0 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                        | A2320454       |
| <b>DP-HR-U-CPU-Fiber(M) Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                      | A2320272       |
| <b>DP-HR-U-CPU-Fiber(M) Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                            | A2320127       |
| <b>DP-HR-U-CPU-Fiber(M)-DH 3.0 Basic</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                           | A2320455       |
| <b>DP-HR-U-CPU-Fiber(M)-DH 3.0 Incl. PowerPack</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                 | A2320456       |
| <b>DP-HR-U-CPU-Fiber(M)-DH Basic</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                               | A2320183       |

| Description                                                                                                                                                                                                                | Article number |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>DP-HR-U-CPU-Fiber(M)-DH Incl. PowerPack</b><br>Dual head computer module (fiber multimode) to extend 2 DisplayPort signals using 1 transmission line                                                                    | A2320182       |
| <b>DP-HR-U-CPU-Fiber(M)-DH-UC 3.0 Incl. PowerPack</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode | A2320458       |
| <b>DP-HR-U-CPU-Fiber(M)-DH-UC Basic</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode               | A2320185       |
| <b>DP-HR-U-CPU-Fiber(M)-DH-UC Incl. PowerPack</b><br>Dual head splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode     | A2320184       |
| <b>DP-HR-U-CPU-Fiber(M)-MC2 3.0 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                             | A2320459       |
| <b>DP-HR-U-CPU-Fiber(M)-MC2 3.0 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                   | A2320460       |
| <b>DP-HR-U-CPU-Fiber(M)-MC2 Basic</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                                 | A2320172       |
| <b>DP-HR-U-CPU-Fiber(M)-MC2 Incl. PowerPack</b><br>Computer module to extend DisplayPort signals via fiber multimode                                                                                                       | A2320171       |
| <b>DP-HR-U-CPU-Fiber(M)-UC 3.0 Basic</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode                        | A2320461       |
| <b>DP-HR-U-CPU-Fiber(M)-UC 3.0 Incl. PowerPack</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode              | A2320462       |
| <b>DP-HR-U-CPU-Fiber(M)-UC Basic</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode                            | A2320273       |
| <b>DP-HR-U-CPU-Fiber(M)-UC Incl. PowerPack</b><br>Splitter computer module for transmission of DisplayPort signals to 2 different counterpart stations (extenders or matrix switches) via fiber multimode                  | A2320133       |

# CONTACT

## WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

### TECHNICAL SALES

Tel.: +49 271 23872-333  
 Fax: +49 271 23872-120  
 E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung  
 Obere Leimbach 9 | 57074 Siegen | NRW |  
 Deutschland

Tel.: +49 271 23872-0  
 Fax: +49 271 23872-120  
 E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### US OFFICE

G&D North America Inc.  
 4540 Kendrick Plaza Drive | Suite 100  
 Houston, TX 77032 | United States

Tel.: +1-346-620-4362  
 E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### MIDDLE EAST OFFICE

Guntermann & Drunck GmbH  
 Dubai Studio City | DSC Tower  
 12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178  
 E-Mail: [sales.me@gdsys.com](mailto:sales.me@gdsys.com)

### APAC OFFICE

Guntermann & Drunck GmbH  
 60 Anson Road #17-01  
 Singapore 079914

Tel.: +65 9685 8807  
 E-Mail: [sales.apac@gdsys.com](mailto:sales.apac@gdsys.com)