
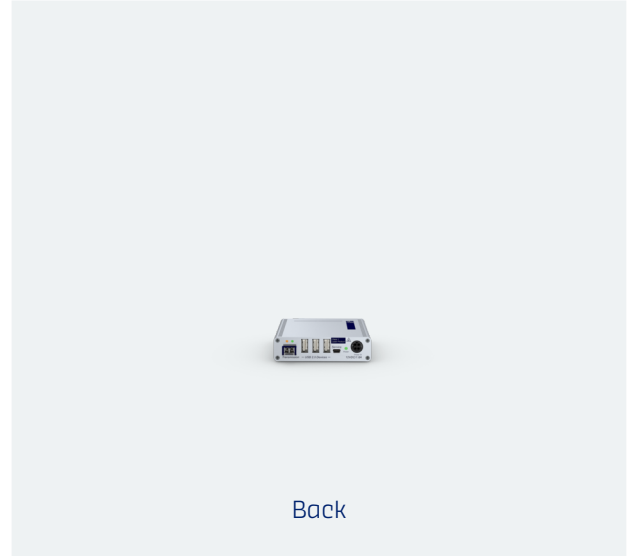


# U2+R-FIBER(M)-CON

KVM extenders, Article number A1120353

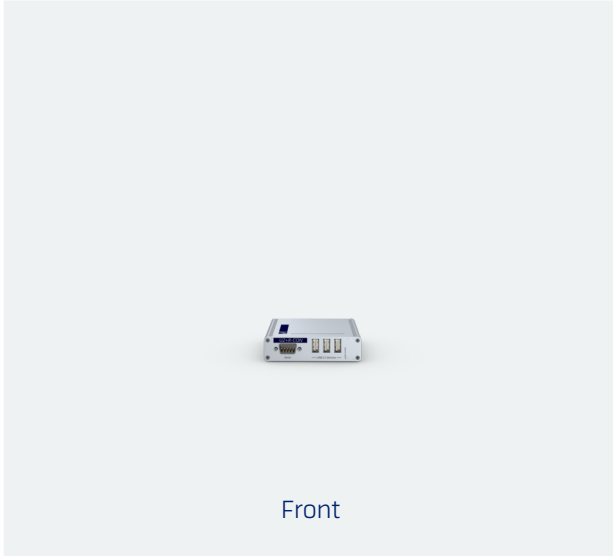

The U2+R-CON console module transmits USB2.0 high-speed and RS232 signals from a console to a compatible computer module of the U2+R series.

## SCOPE OF DELIVERY

Quantity	Description	Article number
1	PowerCable-2 Standard cable 2m	A6300057
1	Netzteil 12V / 2,08AFSP025-D12C14 FSP	Z0005926
1	Safety instructions flyer - FCC class B	A9100371

## DETAILS

### SIGNALS

- Transparent RS232 (max. 115,200 bps)
- Embedded USB 2.0 with Hi-Speed, transparent, all USB classes

### TRANSMISSION

- The transmission distance is up to 400 meters over fiber multimode optics, incl. transmission module(s)/SFP transceiver(s)

### DEVICE

- PowerPack not included in the scope of delivery for Basic variants

### WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

## FEATURES

### SIGNALS

- The serial interface can also be configured for RS422 transmission.

## EXTENSIONS

### DEVICE

- External power supply via external 12V power pack or G&D-MultiPower, providing a central and redundant power supply

## TECHNICAL DATA



General	Brand	G&D	
	Product group	KVM extenders	
	Product Family	U2+R-CPU/CON	
	Country of origin	Germany	
	KVM matrix system component	Console module (digital)	
	Power Supply	no redundancy	
Transmission	Number of transmission channels	1	
	Redundant transmission channels	no redundant KVM transmission	
	Range	100 m (62.5/125µm) 200 m (50.0/125µm, OM2) 400 m (50.0/125µm, OM3) 70 m (62.5/125µm) 150 m (50.0/125µm) 400 m (50.0/125µm, OM4 - 4700MHz*km)	
	Laser class	Class 1	
	Type of interface	LC-Duplex	
	Wavelength	850 nm	
	Medium	Fiber MM	
	Data rate	2.5 Gbit/s	
	USB	Separate USB transmission port	no
		Specification	USB 2.0
Medium		Embedded	

	Transmission rate	max. 480 Mbit/s (Hi-Speed)
	Range	max. 400 m
	USB classes	All
Serial 1	Standard	RS232
	Transparent transmission	yes
	Data rate	max. 115,200 bps
	Signals	TxD RxD DTR DSR RTS CTS DCD
Serial 2	Standard	RS422
	Transparent transmission	yes
	Data rate	max. 115,200 bps
	Signals	TxA TxB RxB RxA GND
Maintenance	Update via	Update Wizard (service interface)
	Serviceport settings	115200bps (8/N/1)
Housing	Material	Anodised aluminium
	Active cooling (fan)	no
	Width ca.	105 mm

	Height ca.	26 mm
	Depth ca.	104 mm
	IP protection class	IP20
	Weight ca.	0.27 kg
Operating conditions	Operating environment temperature	5 °C to 45 °C
	Operating air humidity, non-condensing	20 % to 80 %
	Area of application	Indoor use
	Maximum operating altitude above sea level	3,048 m
	Storage environment temperature	-20 °C to 60 °C
	Storage air humidity, non-condensing	15 % to 80 %
	MTBF	280,000 h at 25°C
	Conformities	CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads)
Power supply	Quantity	1
	Type	External
	Input voltage	12 VDC
	Current consumption	1.8 A

	Power consumption idle	1.68 W
	Power consumption max.	18.48 W
	Heat output idle	1.68 W / 5.73 BTU/h
	Heat output max.	3.48 W / 11.87 BTU/h

## ACCESSORY PRODUCTS

Image	Description	Article number
	<b>USB-Service-2 cable 2m</b> Cable for system updates and configuration	A6200103
	<b>CaseMount-Set-105-26 mounting bracket</b> Screws & brackets for mounting devices with dimensions 105x26mm in DeviceCarriers	A7000020

## MORE VARIANTS

Description	Article number
<b>U2+R-CON</b> User console for transparent USB2.0 transmission (high-speed) via CAT cable	A1120352
<b>U2+R-Fiber(S)-CON</b> User console for transparent USB2.0 transmission (high-speed) via fiber singlemode	A1120354

# CONTACT

## WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

### TECHNICAL SALES

Tel.: +49 271 23872-333  
Fax: +49 271 23872-120  
E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung  
Obere Leimbach 9 | 57074 Siegen | NRW |  
Deutschland

Tel.: +49 271 23872-0  
Fax: +49 271 23872-120  
E-Mail: [sales@gdsys.com](mailto:sales@gdsys.com)

### US OFFICE

G&D North America Inc.  
4540 Kendrick Plaza Drive | Suite 100  
Houston, TX 77032 | United States

Tel.: +1-346-620-4362  
E-Mail: [sales.us@gdsys.com](mailto:sales.us@gdsys.com)

### MIDDLE EAST OFFICE

Guntermann & Drunck GmbH  
Dubai Studio City | DSC Tower  
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178  
E-Mail: [sales.me@gdsys.com](mailto:sales.me@gdsys.com)

### APAC OFFICE

Guntermann & Drunck GmbH  
60 Anson Road #17-01  
Singapore 079914

Tel.: +65 9685 8807  
E-Mail: [sales.apac@gdsys.com](mailto:sales.apac@gdsys.com)