



U2+R-FIBER(M)-CPU INCL. POWERPACK

KVM extenders, Article number A2320281

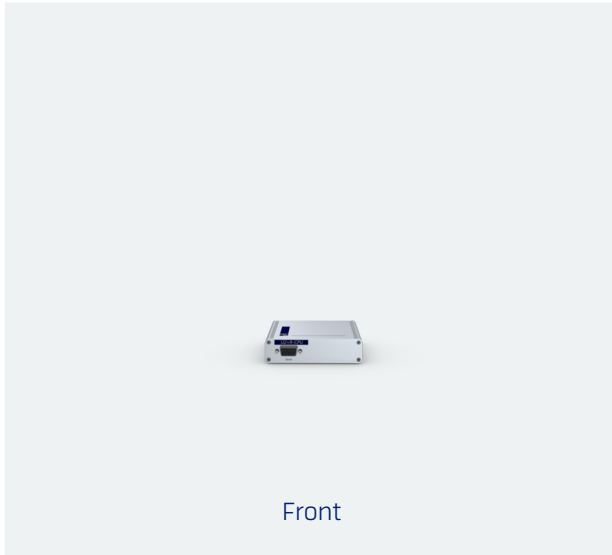

Front

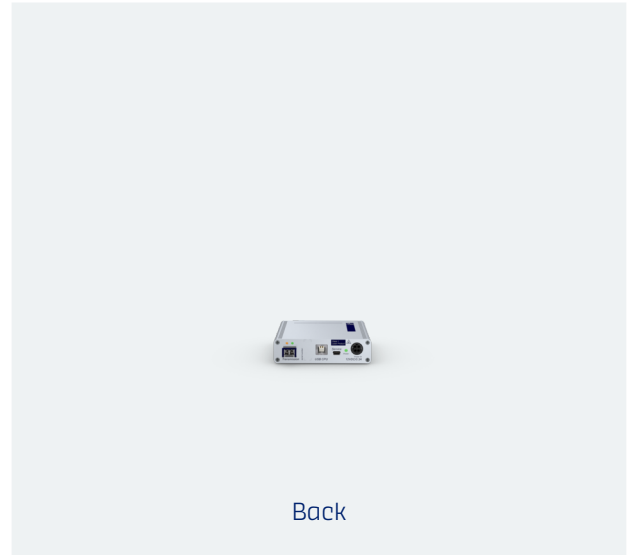

Back

The U2+R-CPU computer module receives USB2.0 high-speed and RS232 signals from a compatible console module of the U2+R series and transmit them to the computer.

SCOPE OF DELIVERY

Quantity	Description	Article number
1	PowerCable-2 Standard cable 2m	A6300057
1	USB-AM/BM-2 cable USB 2m	A6300113
1	RS232-M/F-2 cable RS232 2m	A6300023
1	Netzteil 12V / 2,08AFSP025-D12C14 FSP	Z0005926
1	Safety instructions flyer - FCC class B	A9100371

DETAILS

SIGNALS

- Transparent RS232 (max. 115,200 bps)
- Embedded USB 2.0 with Hi-Speed, transparent, all USB classes

TRANSMISSION

- The transmission distance is up to 400 meters over fiber multimode optics, incl. transmission module(s)/SFP transceiver(s)

DEVICE

- PowerPack not included in the scope of delivery for Basic variants

WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

FEATURES

SIGNALS

- The serial interface can also be configured for RS422 transmission.

EXTENSIONS

DEVICE

- External power supply via external 12V power pack or G&D-MultiPower, providing a central and redundant power supply

TECHNICAL DATA

General	Product group	KVM extenders
	Product Family	U2•R-CPU/CON
	KVM matrix system component	Computer module (digital)
	Power Supply	no redundancy
Transmission	Number of transmission channels	1
	Redundant transmission channels	no redundant KVM transmission
	Range	100 m (62.5/125µm) 200 m (50.0/125µm, OM2) 400 m (50.0/125µm, OM3) 70 m (62.5/125µm) 150 m (50.0/125µm) 400 m (50.0/125µm, OM4 - 4700MHz*km)
	Laser class	Class 1
	Type of interface	LC-Duplex
	Wavelength	850 nm
	Medium	Fiber MM
	Data rate	2.5 Gbit/s
USB	Separate USB transmission port	no
	Specification	USB 2.0
	Medium	Embedded
	Transmission rate	max. 480 Mbit/s (Hi-Speed)
	Range	max. 400 m

Serial 1	USB classes	All
	Standard	RS232
	Transparent transmission	yes
	Data rate	max. 115,200 bps
	Signals	TxD RxD DTR DSR RTS CTS DCD
Serial 2	Standard	RS422
	Transparent transmission	yes
	Data rate	max. 115,200 bps
	Signals	TxA TxB RxB RxA GND
Maintenance	Update via	Update Wizard (service interface)
	Serviceport settings	115200bps (8/N/1)
Housing	Material	anodised aluminium
	Width ca.	105 mm
	Height ca.	26 mm
	Depth ca.	104 mm
	IP protection class	IP20

Operating conditions	Weight ca.	0.26 kg
	Operating temperature	5 °C to 45 °C
	Operating air humidity, non-condensing	20 % to 80 %
	Area of application	Indoor use
	Maximum operating altitude above sea level	3,048 m
	Storage temperature	-20 °C to 60 °C
	Storage air humidity, non-condensing	15 % to 80 %
	MTBF	280,000 h at 25°C
	Conformities	CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads)
Power supply	Quantity	1
	Type	External
	Input voltage	12 VDC
	Current consumption	0.3 A
	Power consumption idle	1.86 W
	Power consumption max.	1.98 W
	Heat output idle	1.86 W

	Heat output max.	1.98 W
--	------------------	--------

ACCESSORY PRODUCTS

Image	Description	Article number
	USB-Service-2 cable 2m Cable for system updates and configuration	A6200103
	RS232-M/F-3 cable RS232 3m Cable to connect a serial device	A6300024
	RS232-M/F-5 cable RS232 5m Cable to connect a serial device	A6300025
	USB-AM/BM-3 cable USB 3m USB cable, Type-A Plug/Type-B Plug	A6300114
	USB-AM/BM-5 cable USB 5m USB cable, Type-A Plug/Type-B Plug	A6300111
	CaseMount-Set-105-26 mounting bracket Screws & brackets for mounting devices with dimensions 105x26mm in DeviceCarriers	A7000020

MORE VARIANTS

Description	Article number
U2•R-CPU Basic Computer module for transparent USB2.0 transmission (high-speed) via CAT cable	A2320278
U2•R-CPU incl. PowerPack Computer module for transparent USB2.0 transmission (high-speed) via CAT cable	A2320279
U2•R-Fiber(M)-CPU Basic Computer module for transparent USB2.0 transmission (high-speed) via fiber multimode	A2320280
U2•R-Fiber(S)-CPU Basic Computer module for transparent USB2.0 transmission (high-speed) via fiber singlemode	A2320282
U2•R-Fiber(S)-CPU Incl. PowerPack Computer module for transparent USB2.0 transmission (high-speed) via fiber singlemode	A2320283
U2•R-Fiber(S+)-CPU Basic Computer module for transparent USB2.0 transmission (high-speed) via fiber singlemode+	A2320284
U2•R-Fiber(S+)-CPU Incl. PowerPack Computer module for transparent USB2.0 transmission (high-speed) via fiber singlemode+	A2320285

CONTACT

WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

TECHNICAL SALES

Tel.: +49 271 23872-333
 Fax: +49 271 23872-120
 E-Mail: sales@gdsys.com

HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung
 Obere Leimbach 9 | 57074 Siegen | NRW |
 Deutschland

Tel.: +49 271 23872-0
 Fax: +49 271 23872-120
 E-Mail: sales@gdsys.com

US OFFICE

G&D North America Inc.
 4540 Kendrick Plaza Drive | Suite 100
 Houston, TX 77032 | United States

Tel.: +1-346-620-4362
 E-Mail: sales.us@gdsys.com

MIDDLE EAST OFFICE

Guntermann & Drunck GmbH
 Dubai Studio City | DSC Tower
 12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178
 E-Mail: sales.me@gdsys.com

APAC OFFICE

Guntermann & Drunck GmbH
 60 Anson Road #17-01
 Singapore 079914

Tel.: +65 9685 8807
 E-Mail: sales.apac@gdsys.com