
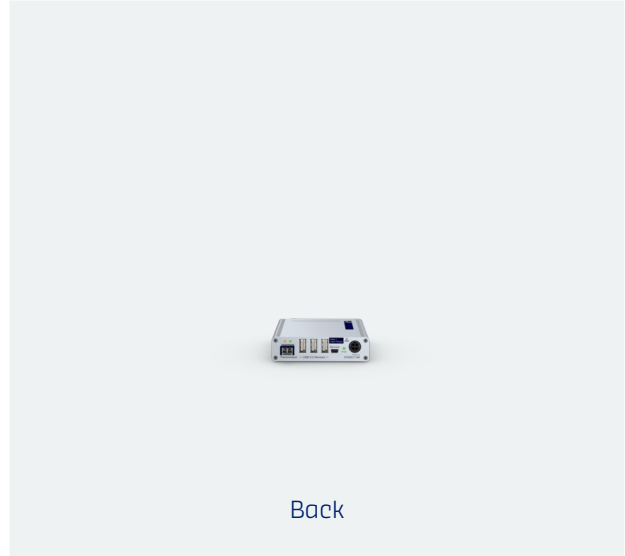


U2+R-FIBER(S+)-CON

KVM extenders, Article number A1120355

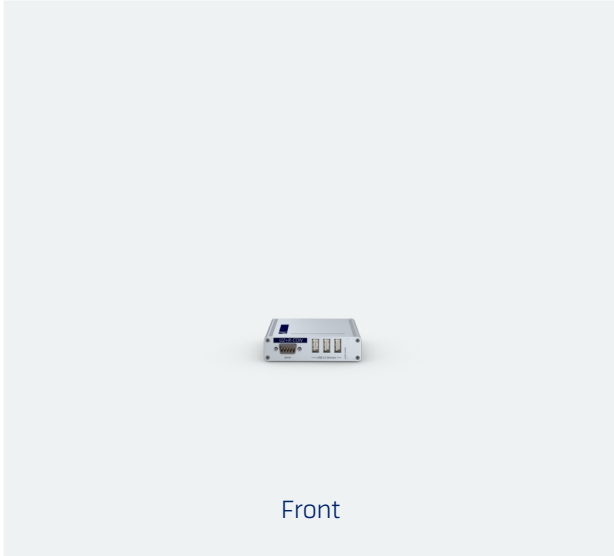

The U2+R-CON console module transmits USB2.0 high-speed and RS232 signals from a console to a compatible computer module of the U2+R series.

SCOPE OF DELIVERY

| Quantity | Description | Article number |
|----------|---|----------------|
| 1 | PowerCable-2 Standard cable 2m | A6300057 |
| 1 | Netzteil 12V / 2,08AFSP025-D12C14 FSP | Z0005926 |
| 1 | Safety instructions flyer - FCC class B | A9100371 |

DETAILS

SIGNALS

- Transparent RS232 (max. 115,200 bps)
- Embedded USB 2.0 with Hi-Speed, transparent, all USB classes

TRANSMISSION

- The transmission distance is up to 10,000 meters over fiber singlemode+ optics, incl. transmission module(s)/ SFP transceiver(s)

DEVICE

- PowerPack not included in the scope of delivery for Basic variants

WARRANTY

- A 3-year, free of charge product guarantee
- For an additional fee guarantee extension possible

FEATURES

SIGNALS

- The serial interface can also be configured for RS422 transmission.

EXTENSIONS

DEVICE

- External power supply via external 12V power pack or G&D-MultiPower, providing a central and redundant power supply



TECHNICAL DATA

| | | |
|--------------|---------------------------------|-------------------------------|
| General | Product group | KVM extenders |
| | Product Family | U2-R-CPU/CON |
| | KVM matrix system component | Console module (digital) |
| | Power Supply | no redundancy |
| Transmission | Number of transmission channels | 1 |
| | Redundant transmission channels | no redundant KVM transmission |
| | Range | 10,000 m (9/125µm, OS1) |
| | Laser class | Class 1 |
| | Type of interface | LC-Duplex |
| | Wavelength | 1,310 nm |
| | Medium | Fiber SM+ |
| | Data rate | 2.5 Gbit/s |
| USB | Separate USB transmission port | no |
| | Specification | USB 2.0 |
| | Medium | Embedded |
| | Transmission rate | max. 480 Mbit/s (Hi-Speed) |
| | Range | max. 10,000 m |
| | USB classes | All |
| Serial 1 | Standard | RS232 |

| | | |
|-------------|--------------------------|---|
| | Transparent transmission | yes |
| | Data rate | max. 115,200 bps |
| | Signals | TxD RxD DTR DSR RTS CTS DCD |
| Serial 2 | Standard | RS422 |
| | Transparent transmission | yes |
| | Data rate | max. 115,200 bps |
| | Signals | TxA TxB RxB RxA GND |
| Maintenance | Update via | Update Wizard (service interface) |
| | Serviceport settings | 115200bps (8/N/1) |
| Housing | Material | Anodised aluminium |
| | Width ca. | 105 mm |
| | Height ca. | 26 mm |
| | Depth ca. | 104 mm |
| | IP protection class | IP20 |
| | Weight ca. | 0.27 kg |

| | | |
|----------------------|--|---|
| Operating conditions | Operating environment temperature | 5 °C to 45 °C |
| | Operating air humidity, non-condensing | 20 % to 80 % |
| | Area of application | Indoor use |
| | Maximum operating altitude above sea level | 3,048 m |
| | Storage environment temperature | -20 °C to 60 °C |
| | Storage air humidity, non-condensing | 15 % to 80 % |
| | MTBF | 280,000 h at 25°C |
| | Conformities | CE compliant (see downloads) UKCA compliant (see downloads) FCC compliant (see manual) TAA compliant (see downloads) EAC compliant (see downloads) RoHS compliant (see downloads) WEEE (reg. no. DE30763240) REACH compliant (see downloads) |
| Power supply | Quantity | 1 |
| | Type | External |
| | Input voltage | 12 VDC |
| | Current consumption | 1.8 A |
| | Power consumption idle | 1.68 W |
| | Power consumption max. | 18.48 W |
| | Heat output idle | 1.68 W |
| | Heat output max. | 3.48 W |

ACCESSORY PRODUCTS

| Image | Description | Article number |
|---|---|----------------|
|  | USB-Service-2 cable 2m Cable for system updates and configuration | A6200103 |
|  | CaseMount-Set-105-26 mounting bracket Screws & brackets for mounting devices with dimensions 105x26mm in DeviceCarriers | A7000020 |

MORE VARIANTS

| Description | Article number |
|--|----------------|
| U2+R-CON User console for transparent USB2.0 transmission (high-speed) via CAT cable | A1120352 |
| U2+R-Fiber(M)-CON User console for transparent USB2.0 transmission (high-speed) via fiber multimode | A1120353 |
| U2+R-Fiber(S)-CON User console for transparent USB2.0 transmission (high-speed) via fiber singlemode | A1120354 |

CONTACT

WE ARE HERE FOR YOU!

If you have any further questions, we are looking forward to advising you on your individual project requirements.

TECHNICAL SALES

Tel.: +1-833-928-1976
Fax: +1-833-928-1976
E-Mail: sales.us@gdsys.com

HEADQUARTERS

Guntermann & Drunck GmbH Systementwicklung
Obere Leimbach 9 | 57074 Siegen | NRW |
Deutschland

Tel.: +49 271 23872-0
Fax: +49 271 23872-120
E-Mail: sales@gdsys.com

US OFFICE

G&D North America Inc.
4540 Kendrick Plaza Drive | Suite 100
Houston, TX 77032 | United States

Tel.: +1-346-620-4362
E-Mail: sales.us@gdsys.com

MIDDLE EAST OFFICE

Guntermann & Drunck GmbH
Dubai Studio City | DSC Tower
12th Floor, Office 1208 | Dubai, UAE

Tel.: +971 4 5586178
E-Mail: sales.me@gdsys.com

APAC OFFICE

Guntermann & Drunck GmbH
60 Anson Road #17-01
Singapore 079914

Tel.: +65 9685 8807
E-Mail: sales.apac@gdsys.com